

# everest

ArteSeries | textured wall panels



Timeless textures,  
superior functionality.

Fibre cement based textured wall panels that emulate authentic designs and are perfect for exterior and interior wall cladding.



MOISTURE  
RESISTANT



WEATHER  
RESISTANT



FIRE  
RESISTANT



IMPACT  
RESISTANT

The textured wall panels can be customized to suit any color and individual aesthetic as per your preference. They are available in four natural textures.




Crumpled



Brick



Sandslate

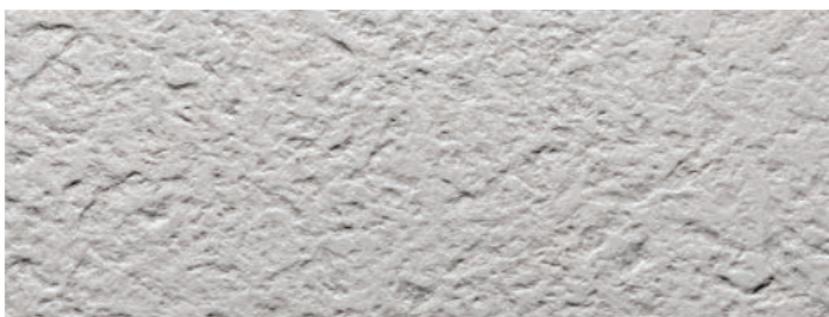

Miral

---

**Size:** 2440mm x 1220mm | **Thickness:** 8mm



## Technical Specifications

Description	ArteSeries Textured Wall Panels
Specification Standard	IS 14862:2000
Type	A
Category	3
Apparent Density	>1200 kg/m <sup>3</sup>
Modulus of Rupture (in wet condition)	>8 MPa
Thermal Conductivity at 50°C (Mean Temperature)	0.2 W/mk
Moisture Resistance Properties	Moisture Resistant



## Fire Resistance Properties

Reaction to Fire	A2-s1-d0* (EN 13501: Part-1)
Combustibility	Non-Combustible (BS 476, Part IV)
Fire Propagation Index	Pass (BS 476, Part VI)
Surface Spread of Flame	Class 1 - Doesn't Spread Fire (BS 476, Part VII)

\*Non-Combustible with negligible smoke and no fire droplets



### Applications:

- External Cladding
- Internal Wall Lining



## Everest Textured Wall Panels v/s Natural Stone

Properties	ArteSeries Textured Wall Panels	Natural Stone
Labour Intensive	No	Yes
Time Intensive	No	Yes
Maintenance	Low	High
Weight on Building	Lighter	Heavier
Construction Type	Dry	Wet



Everest textured wall panels are eco-friendly, green certified, easier to install, and thus reduce the construction period considerably. Their sleeker form ensures they take up less space, and floors get the space that they truly deserve.



# Everest ArteSeries Textured Wall Panels

## System Components:

1. Existing Wall
- 2/3. Framing System
4. Cleat
5. Nut and Bolt
6. 6/9mm Thickness Everest SuperHD
7. 25mm Everest Screw
8. ArteSeries Textured Wall Panel
9. 35mm Everest Screw

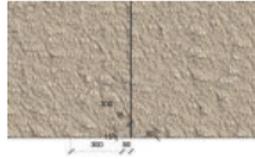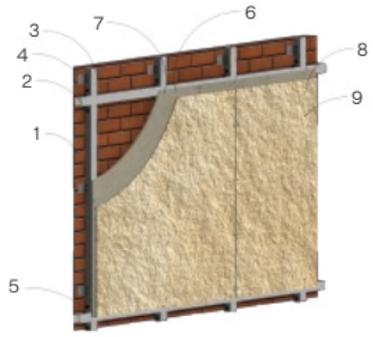

## System Components



ArteSeries  
Textured Wall Panel



6/9mm Thickness  
Everest SuperHD



25/35mm  
Everest Fibre Cement  
Board Screws



51mm Stud



53mm Track



50mm Wide  
Furring Channel  
0.50mm Thick GI



Everest Cement Board  
Jointing Compound



40mm Wide  
Fibre Mesh Tape

# everest

Everest Industries Ltd

Level 3, Tower 14, Solitaire Corporate Park, Chakala,  
Andheri (E), Mumbai - 400 093, India.

Call: 1800-4191-991 | Mail: [info@everestind.com](mailto:info@everestind.com)

[www.everestind.com](http://www.everestind.com)

Scan the QR code  
for brochure and  
installation guide

